

GENERAL:

- All SKITCH products must be properly assembled and securely installed to your vehicle.
- SKITCH products should only be installed on load beds that have bed lining.
- By installing SKITCH products to your vehicle, you assume all liability.
- SKITCH cross bars must only be fitted onto SKITCH bracket kits.
- The SKITCH products must not be modified in any way.
- The manual/instructions should be retained for future reference to ensure any other users of the SKITCH products are familiar with its contents.
- SKITCH cannot guarantee that all tonneau covers will fit perfectly with the SKITCH products due to the many variations in sizes.

FITTING:

- If using the SKITCH products with a tonneau cover, remove the tonneau cover before installation as the tonneau cover's frame sits on top of the SKITCH brackets.
- We recommend that the foam weather strip used on the tonneau cover's rails is trimmed away where it comes into contact with the SKITCH Main brackets, ensuring the rails sit flush on the load bed rails. (this can be replaced by a suitable thinner foam if needed).
- If the tonneau cover frame has a small lip on the inside edge, this lip must be removed where it comes into contact with the SKITCH brackets.
- Confirm the placement needed for the accessories you decide to use on your SKITCH cross bars, before securing the SKITCH cross bars.
- When using SKITCH cross bars: the wider the distance between the bars, the better the stability will be. (We suggest a minimum of 700mm between the cross bars).
- Never over tighten a bolt or nut as this can cause damage to the SKITCH product or to your vehicle.

SAFETY:

- Adjust your driving speed according to road conditions and check your fastenings regularly.
- SKITCH cross bars hold up to 140kg per pair, if properly installed with SKITCH brackets and the weight is evenly distributed across both cross bars.
- Every time the SKITCH products are used, check that the SKITCH products are securely fitted and then re-check at regular intervals.
- The maximum load as specified above, applies to vehicles in motion as well as to parked vehicles.
- The vehicle driver is responsible for ensuring that the racks are in good condition and that the racks and load are securely fastened (Even if fitted by a third party).


SKITCH CROSS BAR SIZE

SMALL = SKC27S = 1690mm

- Ford Ranger
- Mazda BT50
- Nissan Navara
- Toyota Hilux
- Isuzu KB
- Mitsubishi Triton
- Mercedes X Class

LARGE = SKC27L = 1735mm


- VW Amarok

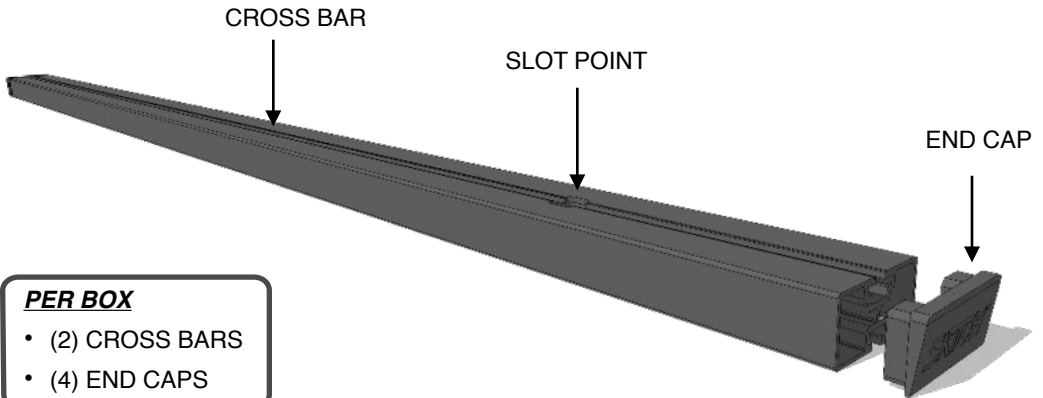

SKITCH cross bars are uniquely designed to use both M8 HEX BOLTS or various T BOLTS for mounting accessories on the top T slot.

TOP T SLOT USE:

- When using M8 HEX BOLTS, a 20mm diameter washer which is 3mm thick must be used. (Alternatively, 1.6mm thick washers may be used).
- The T BOLT'S head cannot exceed a 20mm diameter or 4mm thickness.
- SKITCH cross bars have a unique slot point for installing various bolts, this means that there is no need to remove the end cap once it has been installed.

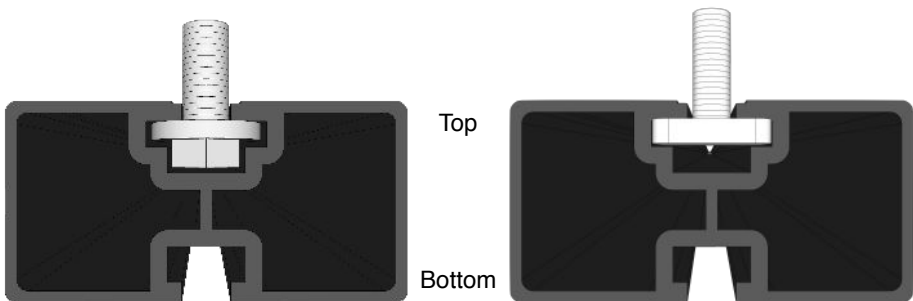

- Four extra 20mm by 3mm washers are provided in the SKITCH bracket bolt kit, to be used for mounting accessories as mentioned above. (Found in bracket box).
- SKITCH cross bars hold up to 140kg per pair, if properly installed with SKITCH brackets and the weight is evenly distributed across both bars. (Vehicle limits may vary, please check vehicle owners manual)



Please see Installation Manual, General & Warranty page before using any SKITCH products. (Installation Manual found in SKITCH bracket box).